

LED T8 Tube

Features, Benefits, Performance

- High brightness EPISTAR 2835 LED chip
- High CRI>80Ra
- Bi-pin G13
- 75% reduction in energy consumption
- 50,000hrs lifespan, 5 years warranty
- Vibration and impact resistant
- No mercury allowing for non-hazardous waste materials
- Instant illumination, no flicker, no buzz
- Minimal UV emission




Parameters


Model	Wattage	Length	Lumens	Voltage	CCT	CRI	PF
NWKT8-10-BC3 (3000K)	10W	4FT	1100-1200lm	100-277VAC	3000K	>80RA	>0.95
NWKT8-10-BC3 (3500K)	10W	4FT		100-277VAC	3500K	>80RA	>0.95
NWKT8-10-BC3 (4000K)	10W	4FT		100-277VAC	4000K	>80RA	>0.95
NWKT8-10-BC3 (4500K)	10W	4FT		100-277VAC	4500K	>80RA	>0.95
NWKT8-10-BC3 (5000K)	10W	4FT		100-277VAC	5000K	>80RA	>0.95
NWKT8-12-BC3 (3000K)	11.8W	4FT	1350-2050lm	100-277VAC	3000K	>80RA	>0.95
NWKT8-12-BC3 (3500K)	11.8W	4FT		100-277VAC	3500K	>80RA	>0.95
NWKT8-12-BC3 (4000K)	11.8W	4FT		100-277VAC	4000K	>80RA	>0.95
NWKT8-12-BC3 (4500K)	11.8W	4FT		100-277VAC	4500K	>80RA	>0.95
NWKT8-12-BC3 (5000K)	11.8W	4FT		100-277VAC	5000K	>80RA	>0.95

Structure

- A. PC cover
- B. LED PCB
- C. D shape aluminum housing
- D. LED driver PC cover
- E. Built-in led driver

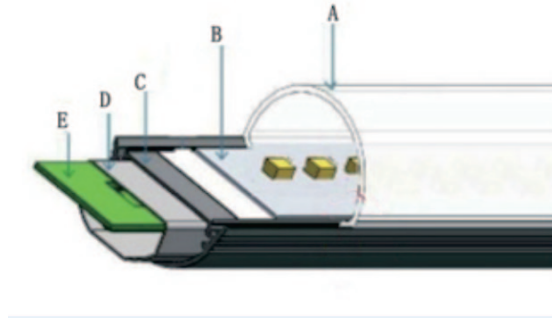

Dimensions

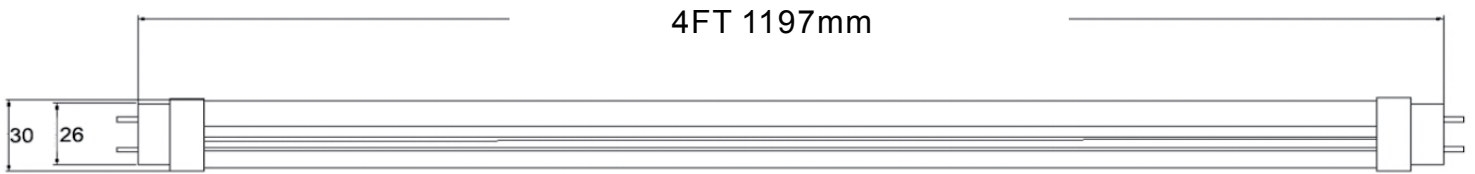

Packing

Length	Q'ty/CTN	Dimensions (cm)	Gross Weight
4FT	25pcs	130*25*25cm	12KG