www.nw-le.com

# LED R7s Lamp

### Features, Benefits, Performance


- High brightness LED chip
- High CRI>80Ra
- R7s J type T3 J118 or J78
- 75% reduction in energy consumption
- 50,000 25,000 hr lifespan, depending on options
- Vibration and impact resistant
- No mercury allowing for non-hazardous waste materials
- Instant illumination, no flicker, no buzz
- Minimal UV emission
- Low profile option fits in tighter fixtures, but is shorter life
- Available with glass or plastic lens
- 3 year warranty
- Available dimmable or non-dimmable
- Available in high-voltage 220-288V (replace "L" with "H")
- Available in 5w, 10w, 14w, 30w packages

## **R7S LED Lamp**



### Standard Parameters

### **ORDERING INFORMATION:**

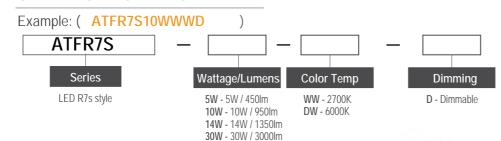

\* 30W only avail in 118mm and has oversize heatsink

### Color Options






All certifications are done under OEM (Fusheng) P/N **R7S-10W** which will always appear on lamp housing. Depending on options ordered, product packaging may bear Trademark or Trade Names Bessky, Bonlux, La Farrah, or NWLE and product packaging may have a Trade Name P/N.

The same driver and LED package is used in all same wattage models. Optional metal housing allows for longer life, damp rating, and use in enclosed fixtures. Standard thermoplastic housing requires airflow and minimizes materials, weight and costs. Lenses standard in clear plastic, but available in glass.

# Linear Tungsten Halogen Bulb R7s LED Bulb R7s LED Bulb Double ended High Double ended Metal

### **Dimensions**

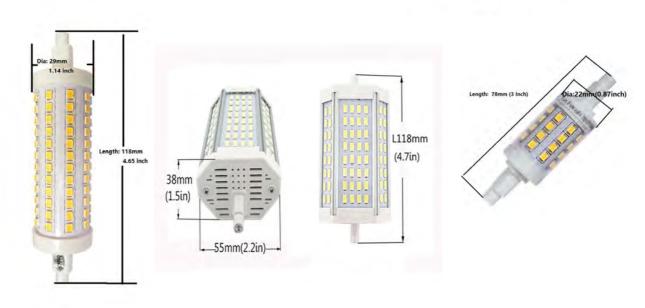

### **Packing**

Pkg Weight	Q'ty/CTN	Dimensions (cm)	Gross Weight
.11kg	100pcs	50*45*30cm	10.5kg